



The storage tank (Bulkstream) is an open to vent tank and operates as a thermal storage vessel. (1,2,3)

The heat exchanger is in turn connected to the main (cold) supply, through the heat exchanger for point of use at the rated pressure of the incoming cold supply. (4,5)




SINCE 2003

Tel: +27 21 872 0900
Fax: +27 21 872 8604
Email: info@xstream.co.za
Web: www.xstream.co.za



FOR TOTAL RELIABILITY YOU CAN COUNT ON!

2000 ℓ Bulkstream tank only.

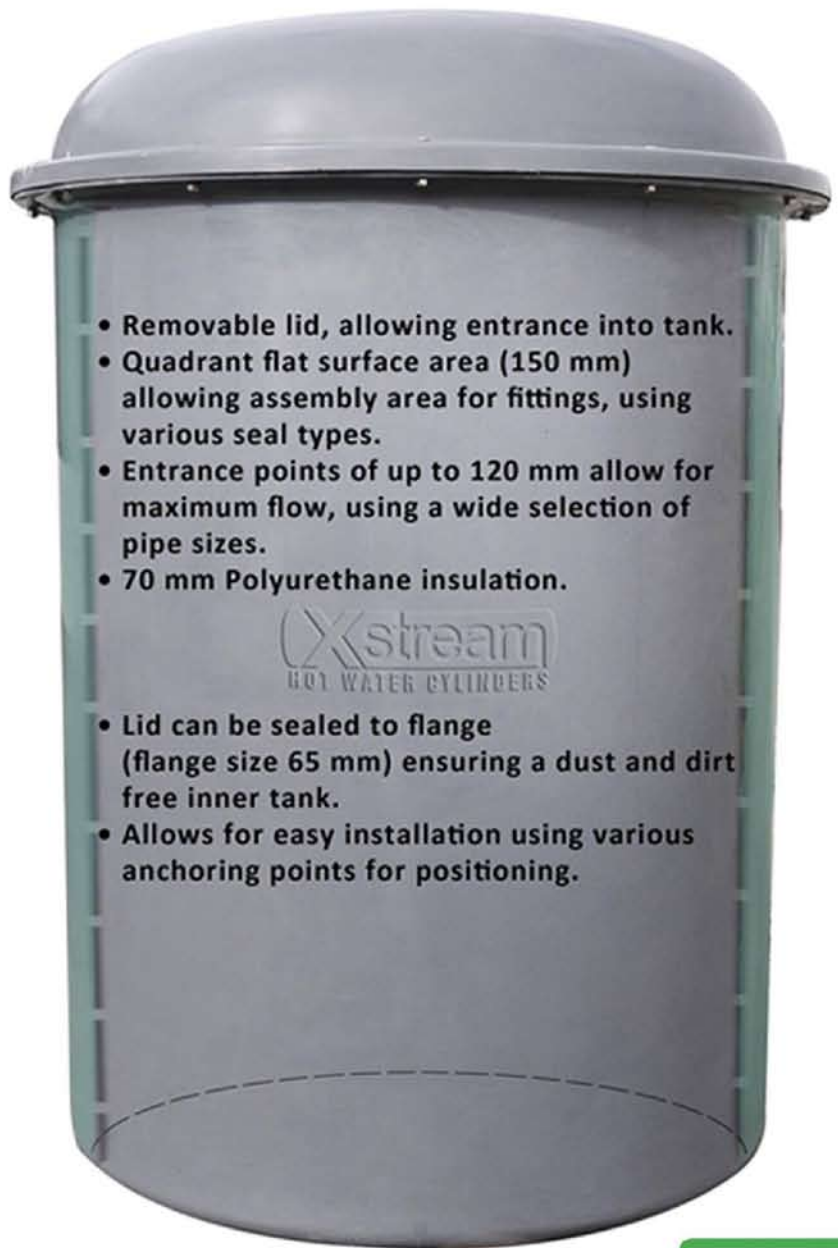

- Removable lid, allowing entrance into tank.
- Quadrant flat surface area (150 mm) allowing assembly area for fittings, using various seal types.
- Entrance points of up to 120 mm allow for maximum flow, using a wide selection of pipe sizes.
- 70 mm Polyurethane insulation.



- Lid can be sealed to flange (flange size 65 mm) ensuring a dust and dirt free inner tank.
- Allows for easy installation using various anchoring points for positioning.



Join us in our effort to reduce the human carbon footprint.

